
KJ15042525/KJ15042425


KAMADOJOE® Konnected Joe™ Stainless Steel Firebowl

! CAUTION - SAFETY PRECAUTIONS - READ BEFORE USE


- Make sure your grill has fully cooled before handling to avoid burns.
- Some components may have sharp edges. Use caution to avoid injury.
- Disconnect the power supply from the grill before handling.

Pictures are for illustration purposes only.

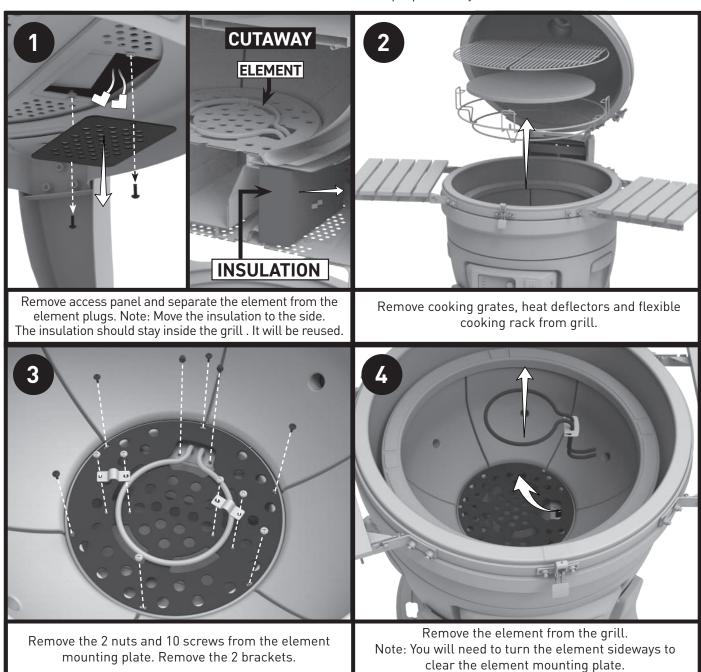





Unplug the pit probe, lid switch, and power supply. from the rear of grill Thread the pit probe and lid switch through the hinge.




Install the disengagement tool on the hinge.



Remove 12 hinge acorn nuts and 12 washers.



Remove the hinge. Remove the lid and set aside. Note: You can loosen the bolt on the upper and lower bands if the hinge will not disengage.

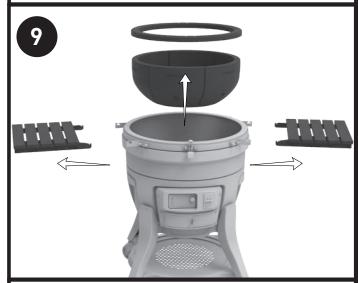


Remove the fire box assembly and side shelves.




Remove the ceramic ring from the grill.



Remove the lower band and stainless steel fire bowl.

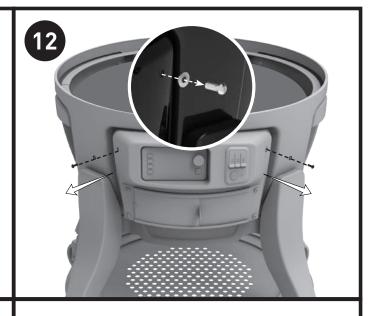

Remove two screws from front module.

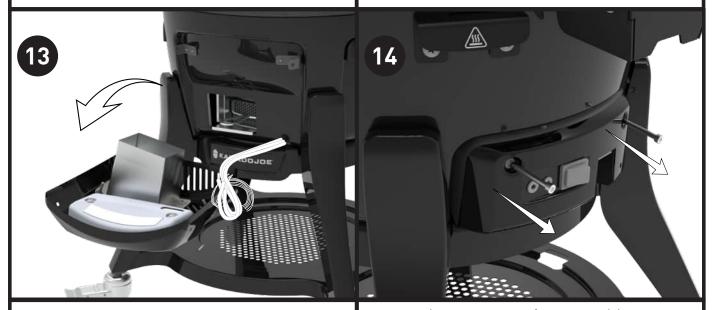


Remove the front module.


Loosen two screws from rear module.
Please note, the screws do not have to be fully removed to disengage the rear module.



Remove the rear module.



Remove the front and rear insulation.

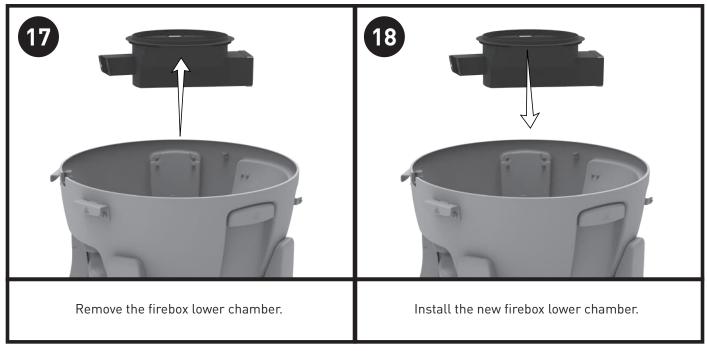

Repeat the steps in reverse order to install the new Stainless Steel Fire Bowl Kit.

KAMADOJOE®